


PHASE


LCSB SwitchBox



Phase LCSB Switchbox Capabilities



PHASE
LCSB Switchbox

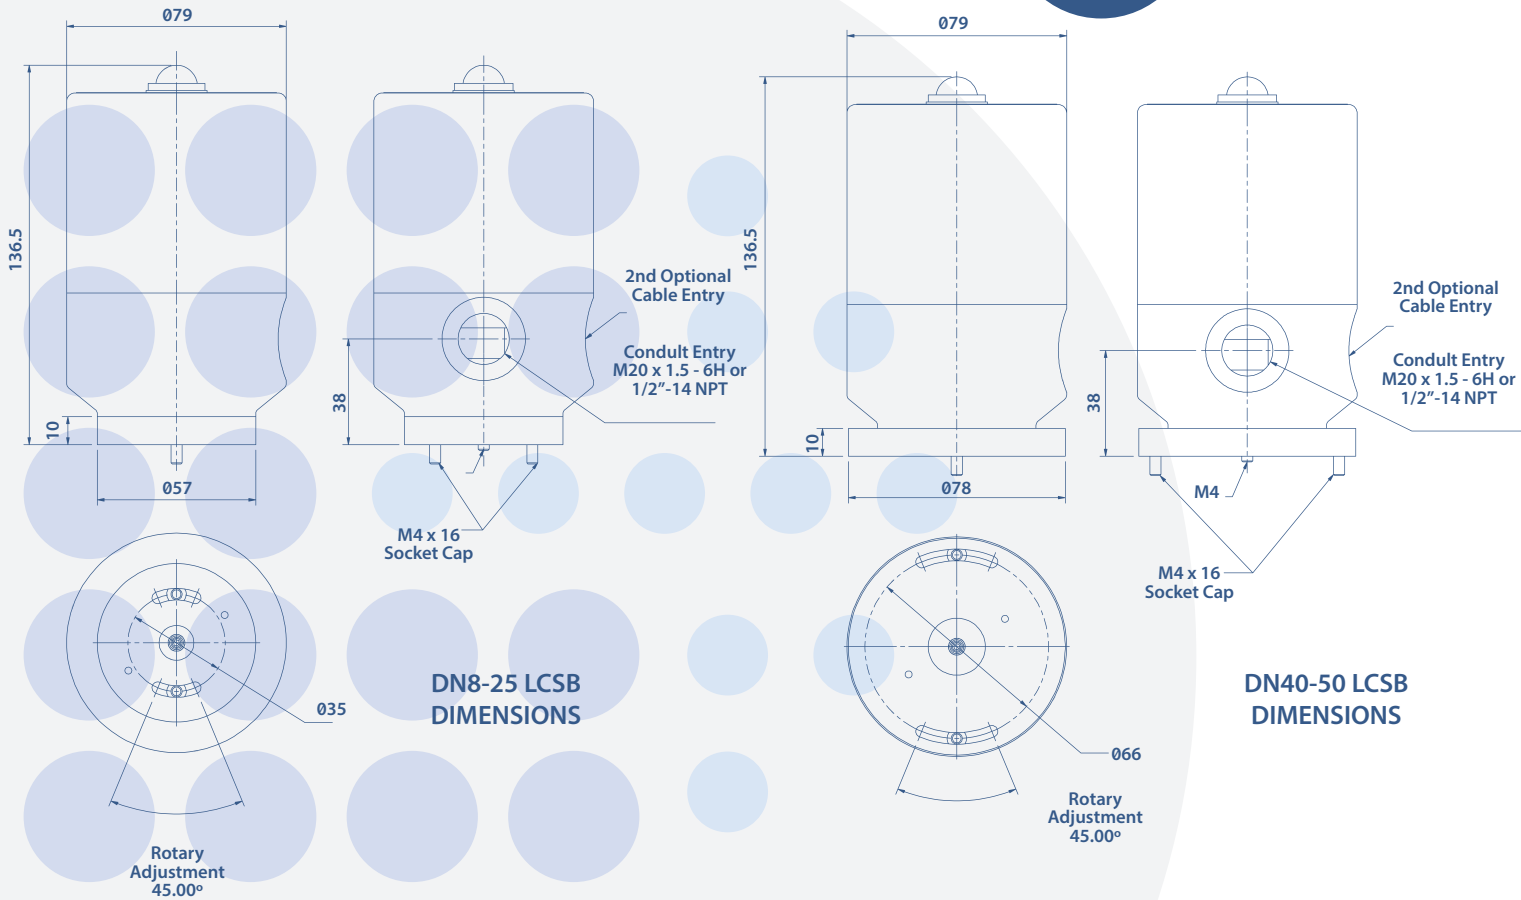

DN8-25 LCSB DIMENSIONS

DN40-50 LCSB DIMENSIONS

Overall height required for cover removal is 225mm

Phase LCSB Switchbox Specification Range:

Suitable:	EC, SSC and S360 actuators for A and HC4 type valves (spring close, spring open and double acting models)
Size Range:	DN8-50 inclusive
Enclosure Connection:	1 x M20 x 1.5 (standard), 1/2" NPTF (optional), Optional 2 x entries for solenoid back wiring
Enclosure Rating:	IP67
Terminals:	5 Way 2.5mm ² conductor plus 2 terminals for back wiring where specified
Switch Options:	No. of switches - 1 or 2. / S.P.D.T. / Silver (standard) / Gold (optional). No. of sensors 1 or 2, 2 wire NAMUR, 2 wire PNP/NPN, 3 wire PNP, 3 wire NPN.
Method of Calibration:	Self Calibrating
Material of Construction:	Acetal, Black
Seals:	Viton Rubber
Temperature Range:	-10 Deg C to +80 Deg C (non IS) EExialIC, T5 -10 Deg C to 80 Deg C, T6 -10 Deg C to 65 Deg C
Standards:	EU directive compliance. / CE marked. / Machinery directive 89/392/EEC. / LV directive (micro switch variants). / 73/23/EEC amended 93/68/EEC. / EMC directive (sensor variants) 89/336/EEC. amended 92/31 EEC & 93/68/EEC. / ATEX directive

* - ATEX Approved



Heap & Partners Ltd